

Technical Data Sheet




Radiant Heating & Cooling Panels


Solray Ceiling Panel 1RC1C:C Copper Tubes

Standard Security, Steel Faced

Data Sheet 7-6

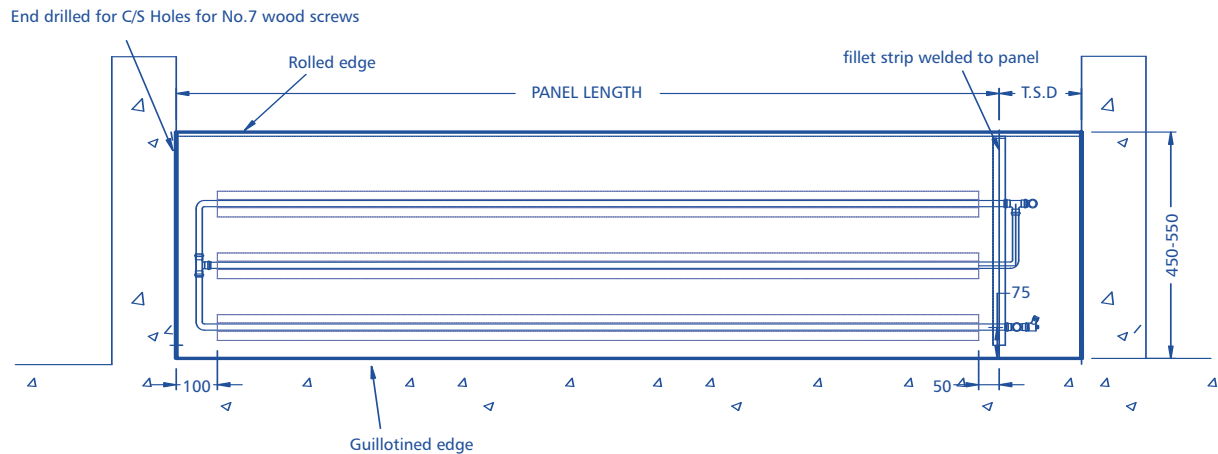

Plan

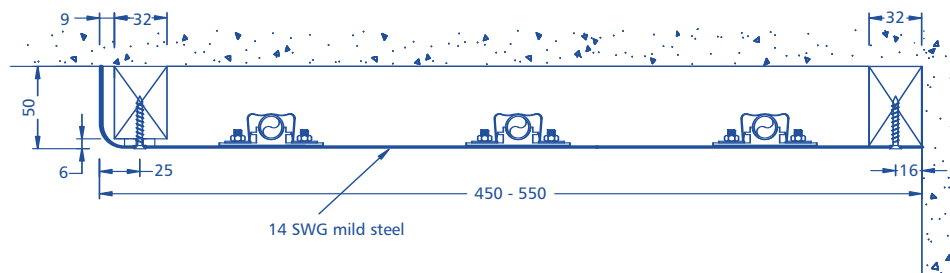

Section

NOTES

Panels finished in a primer for final painting on site by others with the first coat being applied prior to installation, or in a factory applied textured powdercoat to any standard colour.

Panels insulated with 50mm glass fibre class 'o' backed mattress.

Panels fixed at 300mm centres using No. 7 counter-sunk security screws.

Connections are 15mm, 20mm or 25mm BSP sockets.

All edges guillotined.

Panel mass is approximately 40 kg/m².

Panels tested to 700 kPa at works.

Panels can be powder coated to any standard RAL colour on request.

COMYN CHING & CO. (SOLRAY) LTD

SOLRAY WORKS, MANILLA STREET, DOCKLANDS, LONDON E14 8LG

TEL: 020 7987 8787 FAX: 020 7987 9898

WWW.SOLRAY.CO.UK E-MAIL: SALES@SOLRAY.CO.UK